


# RCPM-15

Rack mount monitor, 15" LCD display

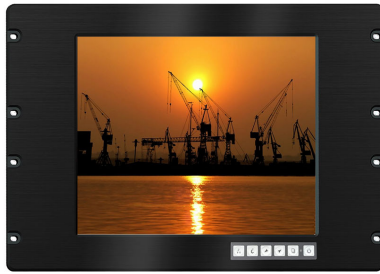

## Features

- 15" XGA TFT LCD Panel support 1024x768 pixels
- Front aluminium panel compliant NEMA4/IP65
- HDMI/DVI, VGA and Audio Ports
- Optional AV, S-vedio, BNC
- Resistive touch screen(USB/COM controller)
- Optional OSD control keys to optimize the display(front or back)
- Build in 2x 2watts stereo speaker .
- DC 12V input with an power adapter(Optional 8~30v DC input)
- Supports server rack ,VESA, embedded, panel mount

## Specifications

LCD Panel	
Display Type	15" LCD (LED backlight)
Resolution	1024 x 768
Max.color	16.7M
Luminance	300 cd/m2
View Angle	178°(H) , 160°(V)
Contrast Ratio	700:1
System	
Touch screen(optional)	Resistive touch screen(USB)
Input Signals	HDMI / DVI, VGA Audio
Speakers	Two 2-watts stereo speaker .
Power Supply	DC 12V input, 100~240V external AC adapter
DC Power (Optional)	DC 8~ 30v input power module

Mechanical and Environmental	
Construction	Aluminium front panel and steel alloy back cover
Operate temperature	-10°C~ 60°C (-14~140°F)
Storage temperature	-20°C ~ 70°C (-4 ~ 158°F)
Storage humidity	5% ~ 95% non-condensing
Dimensions (WxHxD)	482.6 x 310.3 x 42 mm
Weight	Net: 6.0 kg , Gross:9.5 kg

## Ordering Informations

RCPM-15	15" Rack mount display with VGA + HDMI + Audio input, DC 12V power adapter
RCPM-15TU	15" Rack mount display with VGA + HDMI + Audio input, Resistive touch screen, DC 12V adapter

## Dimensions Diagram

